

Optimization for L1-Norm Error Fitting via Data Aggregation

Young Woong Park

Cox School of Business
Southern Methodist University, Dallas, TX, USA.
ywpark@smu.edu

March 16, 2017

Abstract

We propose a data aggregation-based algorithm with monotonic convergence to a global optimum for a generalized version of the L_1 -norm error fitting model with an assumption of the fitting function, by generalizing the previously proposed algorithm by Park and Klabjan (2016). The new algorithm can solve multi-dimensional fitting problems with arbitrary constraints on the fitting coefficients. Any model following the form can be solved optimally using the proposed algorithm. The generalized problem includes popular models such as regression, principal component analysis, and the orthogonal Procrustes problem. The results of the computational experiment show that the proposed algorithms are up to 9,000 times faster than the state-of-the-art benchmarks for the problems and data sets studied.

Keywords. Data Aggregation, Linear Regression, Principal Component Analysis, Curve Fitting

1 Introduction

In many statistical learning models, data fitting is one of the primary tasks of the analysis. Data fitting is the process of fitting a model to the observed data and analyzing the errors and quality of the model fitting. In the popular fitting approach, the method of least squares, the L_2 -norm is used to measure fitting errors. However, the L_2 -norm is known to be sensitive to outliers, and the L_1 -norm has been widely used to build a robust model. While many L_2 -norm-based models have analytical or closed form solutions, L_1 -norm-based models are often not trivial to solve. One solution is to refine the data instead of using the L_1 -norm models, because an extra cleansing of data can reduce the number of outliers. However, it is usually not practical to manually correct or refine the data. For these reasons, L_1 -norm error fitting models are receiving increasing attention. In Figures 1(a) and 1(b), we present search results for keywords “L1 error” and “L1 Norm” by Google Scholar over the past 12 years. In each plot, the horizontal and vertical axes represent the year and the number of search results for the corresponding keyword. Although not all papers in the search results explicitly covered the L_1 -error or L_1 -norm, we observe that the interest in the L_1 version of the problems is generally increasing over time.

In this paper, we consider a generalized version of the L_1 -norm error fitting model

$$E^* = \min_{X \in \Phi} \|B - f(X, A)\|_1, \quad (1)$$

where B is the observed target data (dependent variable or response variable data), A is the feature data (independent variable or explanatory variable data), X is the model parameter matrix in a constrained space Φ , and f is a fitting (mapping) function. Function f is a fitting function of the learning model, where it transforms A to the space of B . Hence, in the rest of the paper, we call f a mapping function. For the L_1 -norm error fitting optimization problem described above with an assumption on mapping function f , we propose a data aggregation-based algorithm with guaranteed global optimum by extending the work of Park and Klabjan [27].

Not only for optimization problems in statistical learning models but also for such problems in many application areas, the capability of solving problems with a large volume of data becomes increasingly important as the quantity of available data continues to expand. However, many existing algorithms do not scale well. To manage a large volume of data, data aggregation has been widely used to obtain approximate

solutions in fields such as network and transportation [1, 2, 3, 8, 10, 12], location [9, 15], production [24], and machine learning [11, 27, 35, 36]. In fact, data aggregation is one of the most natural approaches when a large volume of data must be analyzed. Hence, combined with the increasing quantity of data, data aggregation work also is the subject of an increasing number of research activities, as shown in Figure 1(c).

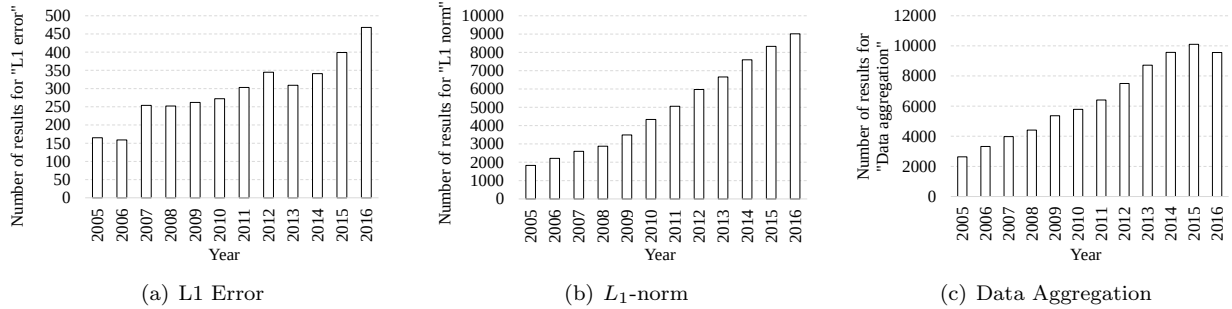


Figure 1: Search results from Google Scholar

Consider a transportation problem with many demand points (at destination). By assuming that close demand points can be combined into one demand point without significant accuracy loss, demand points can be aggregated based on their locations. The resulting data is small enough to obtain an approximate solution to the original problem. After obtaining an approximate solution, a natural attempt is to use less-coarsely aggregated data, because it could give a better approximate solution to the original problem. Rogers et al. [30] defined an iterative procedure of these steps as Iterative Aggregation and Disaggregation (IAD), where the framework iteratively passes information between the original problem and the aggregated problem. The IAD framework had been studied for mathematical programming problems, such as linear programming [22, 31, 34, 37] and 0-1 integer programming [7, 14], in the early 1990s. The reader is referred to Rogers et al. [30] and Litvinchev and Tsurkov [20] for comprehensive literature reviews regarding aggregation techniques applied to optimization problems.

Recently, optimality-preserving algorithms based on data aggregation have been proposed for machine learning problems [27] and network optimization [3] with demonstrated computational efficiency. Park and Klabjan [27] developed a data aggregation-based algorithm, called Aggregate and Iterative Disaggregate (AID), for least absolute deviation regression and support vector machines as well as semi-supervised support vector machines. The computational result shows that the proposed algorithm is competitive when the data size is large. Bärmann et al. [3] developed a data aggregation-based algorithm for network design problems, and the result shows that the data aggregation-based algorithm is competitive for large-scale network optimization problems.

Our contributions are summarized in the following. For the L_1 -norm error fitting problem defined in (1) with an assumption on f that will be introduced in Section 2, we propose a data aggregation-based algorithm that monotonically converges to a global optimum by extending the work of Park and Klabjan [27]. The algorithm in [27] is selectively applied in three machine learning problems; we consider a generalized L_1 -norm error fitting problem, and any problem following the form and assumption can be solved optimally by the proposed algorithm. Further, while all problems considered in Park and Klabjan [27] have a vector as the response (to be fitted), our algorithm can be used for fitting matrices. Our algorithm also can be used for problems with hard constraints on X , including integer requirements and orthogonality constraints. The computational experiment shows that our algorithm outperforms the state-of-the-art benchmarks, and the improvement in computation time increases as data size increases and as the problem being considered is more difficult to solve.

1.1 Review of Aggregate and Iterative Disaggregate

In this section, we review the AID algorithm originally proposed by Park and Klabjan [27]. We assume that we are given a matrix with entries (rows) and attributes (columns). The basic terms of AID [27] are summarized below.

- *Clusters*: The groups into which the entries of the original data are partitioned. Each original entry must belong to exactly one cluster.
- *Aggregated entry*: Representative of each cluster. This aggregated entry is in the same dimension (attribute space) as the original entries.
- *Aggregated data*: The collection of the aggregated entries.
- *Aggregated problem*: A similar optimization problem to the original problem, but one that is defined based on the aggregated data.
- *Declustering*: The procedure of partitioning a cluster into two or more sub-clusters.

The AID algorithm requires several necessary components tailored to a particular optimization problem or a machine learning model.

- Definition of the aggregated data
- Declustering procedures (and criteria)
- Definition of the aggregated problem (typically a weighted version of the problem with the aggregated data)
- Optimality condition

Park and Klabjan [27] states that a clustering procedure must be tailored. However, we believe that any clustering procedure can be used to define clusters for aggregated data, and we removed the clustering procedure decision from the above necessary components. In fact, we believe that “what data should be used for clustering” is a more critical decision than “what clustering procedure should be used.”

The overall algorithmic framework is presented in Algorithm 1. It is slightly modified from the version presented in Park and Klabjan [27], as we add additional termination criteria based on the optimality gap of AID. The algorithm is initialized by defining clusters of the original entries in Line 1. In each iteration (Lines 3 - 5), aggregated data is defined by the current clusters, and the algorithm solves the aggregated problem. If the obtained solution to the aggregated problem satisfies the optimality condition, then the algorithm terminates with an optimal solution to the original problem. Otherwise, the selected clusters (violating the optimality condition) are declustered based on the declustering criteria, and new aggregated data is created. The algorithm continues until the optimality condition is satisfied or the optimality gap of AID is smaller than the tolerance. Observe that the algorithm is finite, as we must stop when each cluster is an entry of the original data. In Park and Klabjan [27] and the computational experiment section of this paper, it is shown that the algorithm terminates much earlier in practice.

Algorithm 1 AID (tol)

Input: tol (tolerance for optimality gap)

- 1: Define initial clusters
 - 2: **Do**
 - 3: Create aggregated data and solve aggregated problem
 - 4: Check optimality condition
 - 5: **if** optimality condition is violated **then** decluster the current clusters
 - 6: **While** optimality condition is not satisfied or optimality gap is greater than tol
-

In Figure 2 (adopted from Park and Klabjan [27]), the concept of the algorithm is illustrated. In Figure 2(a), small circles represent the entries of the original data. They are partitioned into three clusters (large dotted circles), where the crosses represent the aggregated data (three aggregated entries). In the first iteration of AID, the aggregated problem with three aggregated entries in Figure 2(a) is solved. Suppose that the aggregated solution does not satisfy the optimality condition and that the declustering criteria decide to partition all three clusters. In Figure 2(b), each cluster in Figure 2(a) is split into two sub-clusters by the declustering procedure. Suppose that the optimality condition is satisfied after several iterations. Then, AID terminates with guaranteed optimality. Figure 2(c) represents possible final clusters after several iterations from Figure 2(b). Observe that some of the clusters in Figure 2(b) remain the same in Figure 2(c), because the clusters are selectively declustered.

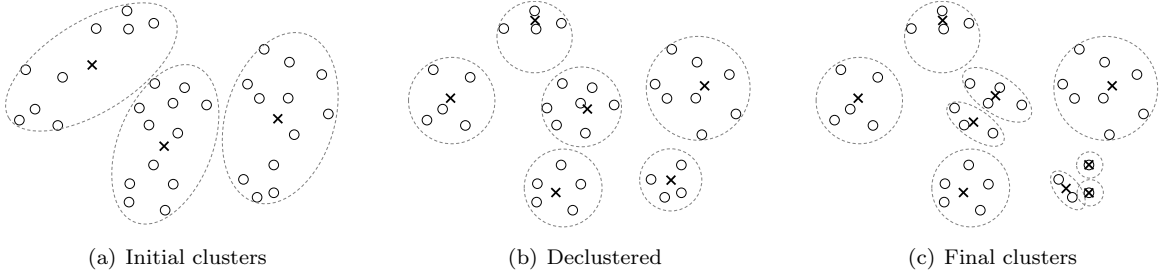


Figure 2: Illustration of AID (Adopted from Park and Klabjan [27])

2 AID for L1-Norm Error Fitting

In this section, we develop the AID algorithm for (1), a generalized version of the L_1 -norm error fitting, with an assumption on mapping function f . We also assume that we are given an algorithm solving a weighted version of (1) optimally. Let us consider matrices $B \in \mathbb{R}^{n \times q}$ and $A \in \mathbb{R}^{n \times m}$, where the two matrices have the same number of rows (n) and different number of columns (q and m , respectively). Without loss of generality, we assume that rows and columns represent entries and attributes, respectively. As presented in the introduction, we consider the L_1 -norm error fitting problem defined as

$$\min_{X \in \Phi} \|B - f(X, A)\|_1,$$

where Φ is an arbitrary feasible space for $X \in \mathbb{R}^{m \times q}$. We emphasize that Φ can be any hard constraint such as a non-convex constraint or integer requirement. We assume that f satisfies

$$f(X, WA) = Wf(X, A), \quad (2)$$

where $W \in \mathbb{R}^{p \times n}$ is a weight matrix. In other words, function f is associative. Hence, transforming A by W before passing to f and transforming the return of f by W give the same outcome. A straightforward example satisfying (2) is linear transformation because $(WA)X = W(AX)$ holds by the associative property of matrix multiplication.

For notational convenience, let $B_i \in \mathbb{R}^q$ be the i^{th} row of B , and $f_i(X, A) \in \mathbb{R}^q$ be the i^{th} row of $f(X, A)$. We use the following notation in the subsequent sections.

- $I = \{1, 2, \dots, n\}$: Index set of entries, where n is the number of entries (observations)
- $K^t = \{1, 2, \dots, |K^t|\}$: Index set of the clusters in iteration t
- $C^t = \{C_1^t, C_2^t, \dots, C_{|K^t|}^t\}$: Set of clusters in iteration t , where C_k^t is a subset of I for any k in K^t
- T : Last iteration of the algorithm when the optimality condition is satisfied
- B^t : Aggregated data for B based on C^t in iteration t
- A^t : Aggregated data for A based on C^t in iteration t

We also define $B_k^t \in \mathbb{R}^q$, $A_k^t \in \mathbb{R}^m$, and $f_k^t \in \mathbb{R}^q$ for B^t , A^t , and $f_k(X, A^t)$, respectively. Given clusters C^t for iteration t , aggregated data $B^t \in \mathbb{R}^{|K^t| \times q}$ and $A^t \in \mathbb{R}^{|K^t| \times m}$ are created by

$$B_k^t = \frac{\sum_{i \in C_k^t} B_i}{|C_k^t|} \in \mathbb{R}^q \text{ and } A_k^t = \frac{\sum_{i \in C_k^t} A_i}{|C_k^t|} \in \mathbb{R}^m$$

for each $k \in K^t$. Note that B_k^t and A_k^t are the entry-wise average of vectors $B_i \in \mathbb{R}^q$ and $A_i \in \mathbb{R}^m$, respectively. Note that one may use median, geometric mean, or another function to define aggregated data depending on the problem considered [27]. Similar to the work of Park and Klabjan [27], we use the arithmetic mean because (i) it is one of the most natural ways to aggregate data and (ii) it plays a key role in proving the optimality.

We first present a characteristic of f under the assumption in (2).

Lemma 1. For any $k \in K^t$, $f_k(X, A^t) = \frac{\sum_{i \in C_k^t} f_i(X, A)}{|C_k^t|}$ holds for any $X \in \Phi$.

Proof. Note that we have $f_k(X, A_k^t) = f_k\left(X, \frac{\sum_{i \in C_k^t} A_i}{|C_k^t|}\right)$. Let $w_{ki}^t = \frac{1}{|C_k^t|}$ for all $i \in C_k^t$, $k \in K^t$ and 0 otherwise. Then, $A^t = W^t A$ and $B^t = W^t B$. We have $f(X, A^t) = f(X, W^t A) = W^t f(X, A)$, where the last equality holds by the assumption in (2). This implies $f_k(X, A^t) = \frac{\sum_{i \in C_k^t} f_i(X, A)}{|C_k^t|}$ for any $X \in \Phi$. $\square$

The aggregated problem is a weighted version of (1) defined in the following.

$$F^t = \min_{X^t \in \Phi} \sum_{k \in K^t} |C_k^t| \|B_k^t - f_k(X^t, A^t)\|_1 \quad (3)$$

Let $\bar{X}^t$ be an optimal solution for (3). Then, $\bar{X}^t$ is a feasible solution to (1) because $\bar{X}^t$ is in the same dimension with X of (1) and $\bar{X}^t \in \Phi$. Let

$$E^t = \|B - f(\bar{X}^t, A)\|_1 \quad (4)$$

be the objective function value of $\bar{X}^t$ for the original problem (1). In the following lemma, the optimality condition, which determines whether $\bar{X}^t$ is an optimal solution for (1), is presented.

Lemma 2. For all $k \in K^t$, if vector $B_i - f_i(\bar{X}^t, A) \in \mathbb{R}^q$ for all $i \in C_k^t$ have the same signs, then $\bar{X}^t$ is an optimal solution to (1).

Proof. Let X^* be an optimal solution to (1) and $E^* = \|B - f(X^*, A)\|_1$ be the optimal objective function value of X^* . Then, we can show

$$\begin{aligned} E^* &= \sum_{i \in I} \|B_i - f_i(X^*, A)\|_1 \\ &= \sum_{k \in K^t} \sum_{i \in C_k^t} \|B_i - f_i(X^*, A)\|_1 \\ &\geq \sum_{k \in K^t} \left\| \sum_{i \in C_k^t} [B_i - f_i(X^*, A)] \right\|_1 \\ &= \sum_{k \in K^t} \left\| |C_k^t| \frac{\sum_{i \in C_k^t} B_i}{|C_k^t|} - |C_k^t| \frac{\sum_{i \in C_k^t} f_i(X^*, A)}{|C_k^t|} \right\|_1 \\ &= \sum_{k \in K^t} |C_k^t| \left\| B_k^t - f_k(X^*, A^t) \right\|_1 \\ &\geq \sum_{k \in K^t} |C_k^t| \left\| B_k^t - f_k(\bar{X}^t, A^t) \right\|_1 \\ &= \sum_{k \in K^t} \left\| |C_k^t| B_k^t - |C_k^t| f_k(\bar{X}^t, A^t) \right\|_1 \\ &= \sum_{k \in K^t} \left\| \sum_{i \in C_k^t} B_i - \sum_{i \in C_k^t} f_i(\bar{X}^t, A) \right\|_1 \\ &= \sum_{k \in K^t} \sum_{i \in C_k^t} \|B_i - f_i(\bar{X}^t, A)\|_1 \\ &= \|B - f(\bar{X}^t, A)\|_1 \\ &\geq E^t, \end{aligned}$$

where the third line holds due to the property of absolute value function; the fifth line holds due to the definition of B^t and A^t and by Lemma 1; the sixth line is true since $\bar{X}^t$ is an optimal solution to (3); the eighth line is true due to the definition of aggregated data and Lemma 1; and the ninth line holds since all observations in C_k^t have the same signs by the assumed condition. Since $\bar{X}^t$ is a feasible solution to (1) and has a smaller or equal objective function value than X^* , we conclude that $\bar{X}^t$ is an optimal solution to (1). $\square$

Note that Lemma 2 explicitly derives a declustering criteria. If the signs of $B_i - f_i(\bar{X}^t, A) \in \mathbb{R}^q$ are not the same for all original entries in C_k^t , then the cluster can be declustered based on the sign patterns. If $q = 1$, then the target matrix B is actually a vector of the original entries. In this case, the declustering procedure naturally divides the cluster into two sub-clusters based on the sign (-1 or 1) of each original entry, which is the case for the problems considered in [27]. However, if $q > 1$, then there can be 2^q patterns of the signs. A natural way of declustering is to create sub-clusters based on the sign patterns in the violating cluster. However, it can generate 2^q sub-clusters in the worst case. In this case, the number of aggregated entries can increase drastically over iterations. For example, when $q = 3$, one cluster can be declustered into

eight clusters in only one iteration in the worst case. When $|K^0| = (0.01)n$, the aggregated data can be equivalent to the original data in three iterations in the worst case. Hence, the benefit of using small-size aggregated data disappears quickly. To overcome this difficulty, we propose the declustering procedure in Algorithm 2.

Algorithm 2 Decluster

```

1: for each cluster  $k \in K^t$ 
2:   if  $\text{sign}(B_i - f_i(\bar{X}^t, A))$  for all  $i \in C_k^t$  are identical then keep the current cluster  $C_k^t$ 
3:   else
4:      $s = \text{mode}\{\text{sign}(B_i - f_i(\bar{X}^t, A)) \mid i \in C_k^t\}$ ,  $C_{k1}^t \leftarrow \emptyset$ ,  $C_{k2}^t \leftarrow \emptyset$ 
5:     for each  $i \in C_k^t$ 
6:       if  $\text{sign}(B_i - f_i(\bar{X}^t, A)) = s$  then  $C_{k1}^t = C_{k1}^t \cup \{i\}$ 
7:       else  $C_{k2}^t = C_{k2}^t \cup \{i\}$ 
8:     end for
9:   end for

```

Note that the procedure works for any q , including $q = 1$. In Line 2, if the cluster satisfies the optimality condition in Lemma 2, the current cluster remains the same. Otherwise, the most frequent sign pattern s is obtained in Line 3, and cluster k is declustered into two sub-clusters in Lines 5 - 8: Cluster C_{k1}^t contains original entries with sign pattern s , and C_{k2}^t contains all the remaining original entries in C_k^t .

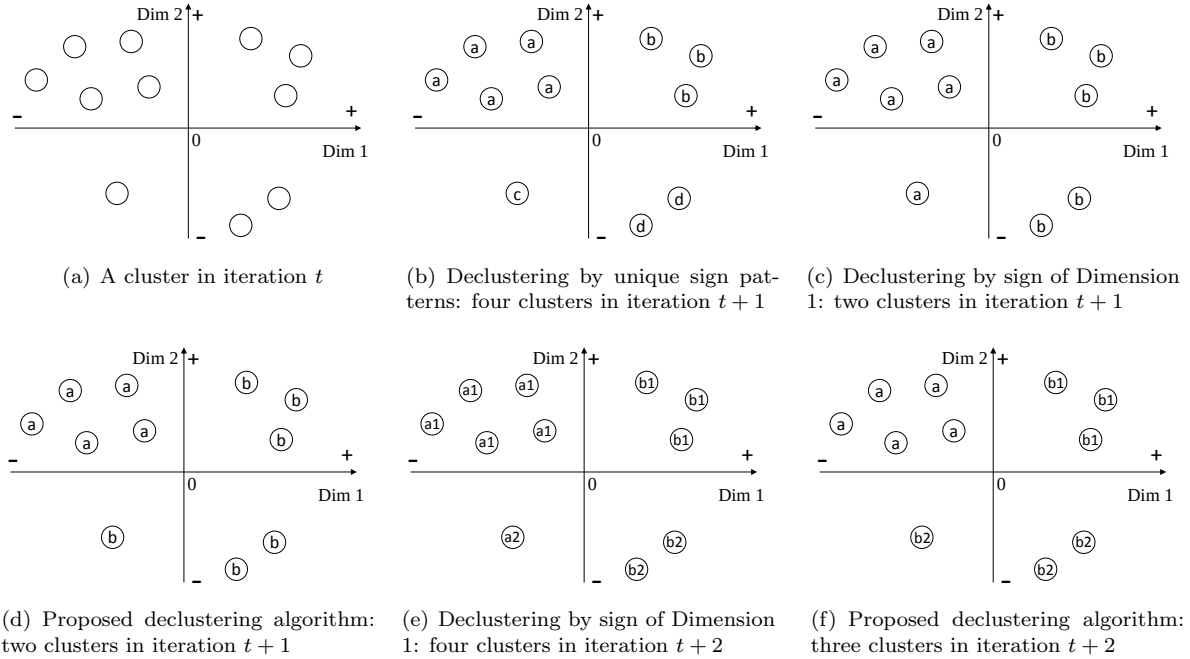


Figure 3: Illustrative example for motivation of Algorithm 2

The motivation behind Algorithm 2 is illustrated in Figure 3. For all the plots in Figure 3, the horizontal and vertical axes are labeled as Dim1 and Dim2, respectively, and circles represent the original entries. Consider a two-dimensional case with a cluster of 11 original entries in Figure 3(a). Hence, $q = 2$ in this example. If we decluster based on the unique sign patterns, we will have four sub-clusters in the next iteration as illustrated in Figure 3(b), because there exist four unique sign patterns (1,1), (1,-1), (-1,1), and (-1,-1). To prevent the number of clusters from growing too fast, we can decluster the current clusters into two sub-clusters, regardless of the dimension of the data. If we assume that the signs remain very similar in the consecutive iterations of AID, the best way to keep the total number of clusters small is to partition the

cluster into two groups. One can decluster by the sign of the first dimension, as illustrated in Figure 3(c), or the proposed algorithm can be used, as illustrated in Figure 3(d). In both cases, the number of clusters in the next iteration is two. However, if AID is close to the optimal and the signs do not change in iteration $t + 1$, the proposed algorithm will have three clusters in iteration $t + 1$ (Figure 3(f)). In contrast, the other approach will need to decluster each of the two clusters in iteration $t + 1$ and have four clusters in iteration $t + 2$ (Figure 3(e)). Observe that the difference in the number of clusters can be significant if we consider all clusters together for large q .

We next show the non-decreasing property of the objective function value F^t in (3) over iterations.

Lemma 3. When (3) is solved optimally in each iteration, $F^{t-1} \leq F^t$ holds.

Proof. For simplicity, let us assume that $\{C_1^{t-1}\} = C^{t-1} \setminus C^t$, $\{C_1^t, C_2^t\} = C^t \setminus C^{t-1}$, and $C_1^{t-1} = C_1^t \cup C_2^t$. That is, C_1^{t-1} is the only cluster in C^{t-1} violating the optimality condition in Lemma 2, and C_1^{t-1} is partitioned into C_1^t and C_2^t for iteration t . The cases such that more than one cluster of C^{t-1} are declustered in iteration t can be proved using the technique in this proof. We derive

$$\begin{aligned}
F^{t-1} &= |C_1^{t-1}| \|B_1^{t-1} - f_1(\bar{X}^{t-1}, A^{t-1})\|_1 + \sum_{k \in K^{t-1} \setminus \{1\}} |C_k^{t-1}| \|B_k^{t-1} - f_k(\bar{X}^{t-1}, A^{t-1})\|_1 \\
&\leq |C_1^{t-1}| \|B_1^{t-1} - f_1(\bar{X}^t, A^{t-1})\|_1 + \sum_{k \in K^{t-1} \setminus \{1\}} |C_k^{t-1}| \|B_k^{t-1} - f_k(\bar{X}^t, A^{t-1})\|_1 \\
&= \|\sum_{i \in C_1^{t-1}} B_i - \sum_{i \in C_1^{t-1}} f_i(\bar{X}^t, A^{t-1})\|_1 + \sum_{k \in K^{t-1} \setminus \{1\}} |C_k^{t-1}| \|B_k^{t-1} - f_k(\bar{X}^t, A^{t-1})\|_1 \\
&= \|\sum_{i \in C_1^t} [B_i - f_i(\bar{X}^t, A^{t-1})] + \sum_{i \in C_2^t} [B_i - f_i(\bar{X}^t, A^{t-1})]\|_1 \\
&\quad + \sum_{k \in K^t \setminus \{1,2\}} |C_k^t| \|B_k^t - f_k(\bar{X}^t, A^t)\|_1 \\
&\leq \|\sum_{i \in C_1^t} [B_i - f_i(\bar{X}^t, A^{t-1})]\|_1 + \|\sum_{i \in C_2^t} [B_i - f_i(\bar{X}^t, A^{t-1})]\|_1 \\
&\quad + \sum_{k \in K^t \setminus \{1,2\}} |C_k^t| \|B_k^t - f_k(\bar{X}^t, A^t)\|_1 \\
&= |C_1^t| \left\| \frac{\sum_{i \in C_1^t} B_i}{|C_1^t|} - \frac{\sum_{i \in C_1^t} f_i(\bar{X}^t, A)}{|C_1^t|} \right\|_1 + |C_2^t| \left\| \frac{\sum_{i \in C_2^t} B_i}{|C_2^t|} - \frac{\sum_{i \in C_2^t} f_i(\bar{X}^t, A)}{|C_2^t|} \right\|_1 \\
&\quad + \sum_{k \in K^t \setminus \{1,2\}} |C_k^t| \|B_k^t - f_k(\bar{X}^t, A^t)\|_1 \\
&= |C_1^t| \|B_1^t - f_1(\bar{X}^t, A^t)\|_1 + |C_2^t| \|B_2^t - f_2(\bar{X}^t, A^t)\|_1 + \sum_{k \in K^t \setminus \{1,2\}} |C_k^t| \|B_k^t - f_k(\bar{X}^t, A^t)\|_1 \\
&= F^t,
\end{aligned}$$

where the second line holds since $\bar{X}^{t-1}$ is an optimal solution to (3) with aggregated data B^{t-1} and A^{t-1} ; the third line holds by the definition of B^{t-1} and by Lemma 1; the fourth line holds since $C_1^{t-1} = C_1^t \cup C_2^t$ and the clusters in K^{t-1} and K^t are identical; the fifth line holds due to the property of L_1 -norm; and the seventh line is true due to the definition of B^t and A^t . This completes the proof. $\square$

Let $E_{\text{best}}^t = \min\{E^1, E^2, \dots, E^t\}$ be the objective function value of the current best solution to the original problem in iteration t . Then, the optimality gap of AID in iteration t can be defined as

$$\delta_{\text{AID}}^t = \frac{E_{\text{best}}^t - F^t}{E_{\text{best}}^t}. \quad (5)$$

Further, combining Lemmas 2 and 3, it can be shown that $E_{\text{best}}^t - F^t$ is non-increasing in iteration t , which indicates that AID monotonically converges to a global optimum of the original problem.

Proposition 1. Given an algorithm that solves (3) optimally, AID for (1) with f satisfying (2) monotonically converges to a global optimum of (1).

We emphasize here that an algorithm solving the aggregated problem (3) optimally is a necessary tool to implement AID. In most cases, if the original problem can be solved optimally, then the weighted version of the original problem also can be solved optimally. However, there exist cases such that the weighted version cannot be solved optimally. A popular example is singular value decomposition. When weights are given to each element of the data matrix, it becomes not trivial to solve, and only approximation algorithms exist in the literature [23]. In Section 3, we consider L_1 -norm-based principal component analysis, where the weighted version of the original problem cannot be solved optimally, and we propose a procedure to solve the aggregated problem optimally given an algorithm for the original problem.

3 L1-Norm Error Fitting Problems

In this section, we introduce several L_1 -norm error fitting problems following the form of (1) with the assumption in (2). By introducing the problems, we show how AID can be implemented for a new L_1 -norm error fitting problem using the result in Section 2. In this section, we focus on two types of problems. Problems in the first category are obtained by adding constraints to least absolute deviation regression, and problems in the second category commonly have orthogonality constraints.

3.1 Least Absolute Deviation Regression and Extensions

Least absolute deviation regression, often referred to as L_1 regression, uses the absolute errors instead of the standard squared errors. In a matrix form, it can be written as

$$\min_X \|B - AX\|_1, \quad (6)$$

where $A \in \mathbb{R}^{n \times m}$ is an independent variable matrix, $B \in \mathbb{R}^{n \times 1}$ is a dependent variable vector, $X \in \mathbb{R}^{m \times 1}$ is a regression coefficient vector. Let us define $f(X, A) = AX$ and $\Phi = \{X \in \mathbb{R}^{m \times 1}\}$. Note that $f(X, WA) = WAX = Wf(X, A)$ holds, and the assumption in (2) is satisfied, because f only performs matrix multiplication. Hence, (6) follows the form of (1), and all the results in Section 2 hold for (6). In fact, Park and Klabjan [27] already developed AID for the L_1 regression. The computational experiment in [27] shows that AID outperforms for a very large volume of data with $n \geq 800,000$ and $m \geq 500$.

Let us next consider the subset selection problem for the L_1 regression, which can be written as

$$\min_{\|X\|_0=p} \|B - AX\|_1, \quad (7)$$

where $A \in \mathbb{R}^{n \times m}$ is the independent variable matrix, $B \in \mathbb{R}^{n \times 1}$ is the dependent variable vector, and $X \in \mathbb{R}^{m \times 1}$ is the regression coefficient vector. Note that everything remains the same from the setting in (6) except that we now have the cardinality constraint $\|X\|_0 = p$. With this constraint, only p independent variables can be used to build a regression model. Recall that feasible space Φ in (1) does not have any restriction. Hence, with $\Phi = \{X \in \mathbb{R}^{m \times 1} \mid \|X\|_0 = p\}$ and $f(X, A) = AX$, it can be shown that (7) is a special case of (1), and AID in Section 2 can be used.

The subset selection problem for multiple linear regression can be formulated as a mixed integer programming (MIP) problem by introducing binary variables z_j for each independent variable $j \in J$. Depending on the objective function to be optimized, various MIP formulations have been proposed for mean square error [26], mean absolute error [26], sum of square error [4, 5], and sum of absolute error [5, 17]. The model in (7) is used to minimize the sum of absolute errors, and a mixed integer programming model can be written as

$$\min \quad \sum_{i \in I} e_i^+ + e_i^- \quad (8a)$$

$$s.t. \quad e_i^+ - e_i^- = \sum_{j \in J} a_{ij}(x_j^+ - x_j^-) - b_i, \quad i \in I, \quad (8b)$$

$$x_j^+ + x_j^- \leq Mz_j, \quad j \in J, \quad (8c)$$

$$\sum_{j \in J} z_j = p, \quad (8d)$$

$$z \in \{0, 1\}^{|J|}, e^+, e^-, x^+, x^- \geq 0, \quad (8e)$$

where e_i^+ and e_i^- are positive and negative residuals for entry $i \in I$, x_j^+ and x_j^- are positive and negative regression coefficients for explanatory variable $j \in J$, and M is a large number.

Another extension of L_1 regression (6) is to impose special requirement for the regression coefficients. Least squares over a sphere [13] minimizes the sum of squared errors of the linear regression model, while the regression coefficients need to satisfy special requirement $\|X\|_2^2 \leq R$ for a user-given parameter R . The L_1 -norm version of the least square over a sphere can be written as follows.

$$\min_{\|X\|_2^2 \leq R} \|B - AX\|_1 \quad (9)$$

Note that (9) can be formulated with quadratically constrained linear programming (QCLP) by using the same variables, adding constraint $\|X\|_2^2 \leq R$, and removing (8c) and (8d).

$$\begin{aligned}
\min \quad & \sum_{i \in I} e_i^+ + e_i^- \\
\text{s.t.} \quad & e_i^+ - e_i^- = \sum_{j \in J} a_{ij}(x_j^+ - x_j^-) - b_i, \quad i \in I, \\
& \sum_{j \in J} (x_j^+)^2 + (x_j^-)^2 \leq R, \\
& z \in \{0, 1\}^{|J|}, e^+, e^-, x^+, x^- \geq 0.
\end{aligned} \tag{10}$$

In the computational experiment, we study the L_1 regression subset selection problem (7) and L_1 regression over a sphere (9). Note that most solvers for MIP (8) and QCLP (9) can easily give a weight for each entry. Therefore, algorithms for solving the aggregated problems of (8) and (9) are given, and AID can be used without non-trivial modifications.

In most MIP models in the literature, (8) is not easy to solve optimally (prove optimality) because it is difficult to fathom or prone nodes in the branch and bound algorithm. As n, m , and p increase, it becomes more difficult to prove optimality, although the solution obtained after a few minutes may be an optimal solution or a close approximation [26]. In the computational experiment, it is shown that MIP with the original data struggles with reducing the optimality gap, while AID can terminate in a faster time for large data.

3.2 L1-Norm Error Fitting with Orthogonal Matrices

Principal Component Analysis (PCA) constructs orthogonal vectors to explain the variance structure of the data. The solution to the standard PCA can be obtained by singular value decomposition or eigenvalue decomposition. While the standard PCA uses the L_2 -norm for measuring the errors and deviations, L_1 PCA uses the L_1 -norm. However, unlike the standard L_2 PCA, optimal solutions cannot be obtained by singular value decomposition or eigenvalue decomposition. There are two types of L_1 PCA problems. The first problem minimizes the reconstruction error. It is written as

$$\min_{X^\top X = I_p} \|A - AX X^\top\|_1, \tag{11}$$

where $A \in \mathbb{R}^{n \times m}$ is the data matrix and $X \in \mathbb{R}^{m \times p}$ is the principal component matrix that is orthogonal. Let us define $B = A$, $f(X, A) = AX X^\top$, and $\Phi = \{X \in \mathbb{R}^{m \times m} | X^\top X = I_p\}$. Note that $f(X, WA) = WAX X^\top = Wf(X, A)$ holds. Further, since Φ in (1) can be any constraint, (11) is a special case of (1), and AID in Section 2 can be used. Recent research works [6, 28] consider (11), but no known algorithm in the literature can solve it optimally.

The second L_1 PCA problem maximizes the projected deviation, and it is written as

$$\max_{X^\top X = I_p} \|AX\|_1. \tag{12}$$

By defining $B = 0$, $f(X, A) = AX$, and $\Phi = \{X \in \mathbb{R}^{m \times m} | X^\top X = I_p\}$, we can show that (12) follows the form of (1) after converting the maximization problem into a minimization problem. Further, we have $f(X, WA) = WAX = Wf(X, A)$. Therefore, (12) can be solved by AID in Section 2. There exist several research works for (12) [16, 18, 21, 25], yet the only known algorithm solving (12) optimally is the algorithm by Markopoulos et al. [21].

In Figure 4, we illustrate AID for (12). In Figure 4(a), the small circles and crosses represent the original and aggregated entries, respectively, and the large dotted circles are the clusters associated with the aggregated entries. All the entries are plotted in the projected dimension with two principal components obtained in iteration t . The horizontal and vertical axes are for the first and second principal components, respectively. In Figure 4(b), two clusters have original entries with different sign patterns and violate the optimality condition. The left violating cluster is declustered into two sub-clusters based on the unique sign patterns (-1,1) and (-1,-1). However, the right violating cluster has four unique sign patterns. By Algorithm 2, the first sub-cluster contains the original entries with sign pattern (1,-1), as the most frequent sign pattern

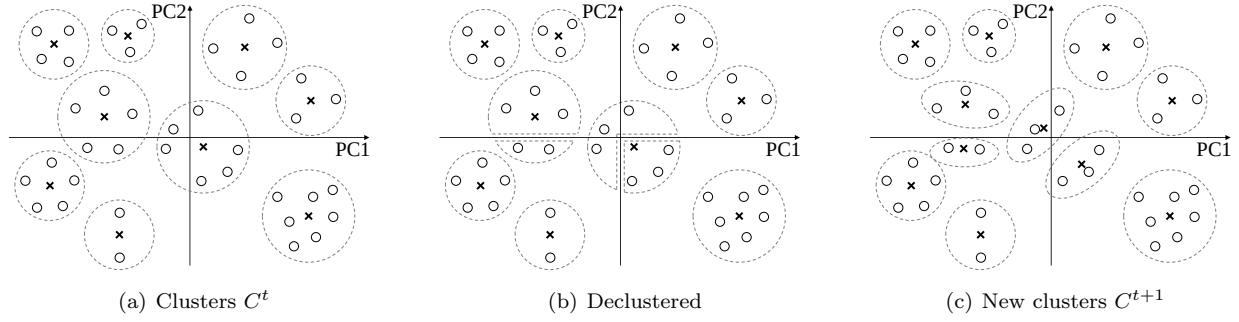


Figure 4: Illustration of AID for L_1 PCA (12)

is (1,-1) in the current cluster, and the second sub-cluster contains the others. In Figure 4(c), new clusters and aggregated data are presented.

Another problem that has the orthogonality constraint is the Orthogonal Procrustes problem, which is written as

$$\min_{X^T X = I_p} \|B - AX\|_1, \quad (13)$$

where $B \in \mathbb{R}^{n \times m}$ and $A \in \mathbb{R}^{n \times m}$ are dependent and independent data matrices, and $X \in \mathbb{R}^{m \times m}$ is an orthogonal transition matrix. Let us define $f(X, A) = AX$ and $\Phi = \{X \in \mathbb{R}^{m \times m} | X^T X = I_p\}$. Then, it is easy to see that (13) follows the form of (1), and all the results in Section 2 hold. A few works [32, 33] propose approximation algorithms for (13), yet no known algorithm guaranteeing optimality exists.

Note that the results in Section 2 state that, given an algorithm solving the weighted version (3) optimally, AID solves the original problem (1) optimally. However, out of the three problems, only (12) has a known algorithm solving the problem optimally. Markopoulos et al. [21] proposed an algorithm based on an enumeration of possible binary sign choices over original entries. However, the drawback is that the algorithm's running time is $O(n^{mp-p+1})$. Another issue is the availability of a solver for the weighted version. The algorithm in [21] cannot explicitly give weights to the errors of the entries.

In the rest of this section, we present an approach to solve the aggregated problem of (12). The proposed algorithm can solve the aggregated problem optimally. Note that the aggregated problem for (12) is defined as

$$\max_{X^T X = I_p} \sum_{k \in K^t} |C_k^t| \|A_k^t X\|_1. \quad (14)$$

Since we are given an algorithm that only solves an unweighted version of the problem, we will convert (14) into an unweighted version with the equivalent solution under some conditions. Let $\bar{A}^t \in \mathbb{R}^{|K^t| \times m}$ be the weighted aggregated data matrix, with each element defined as

$$\bar{A}_{kj}^t = |C_k^t| A_{kj}^t \text{ for } k \in K^t, j \in J.$$

Then, the modified aggregated problem, an unweighted version of (14), can be written as follows.

$$\max_{X^T X = I_p} \sum_{k \in K^t} \|\bar{A}_k^t X\|_1 \quad (15)$$

Proposition 2. An optimal solution to (15) is an optimal solution to (14).

Proof. Let $\hat{X}$ be an optimal solution to (15) and $\bar{X}$ be an optimal solution to (14). First, $\hat{X}$ is a feasible solution to (14). Next, we have

$$\sum_{k \in K^t} |C_k| \|A_k^t \bar{X}\|_1 \geq \sum_{k \in K^t} |C_k| \|A_k^t \hat{X}\|_1 = \sum_{k \in K^t} \|\bar{A}_k^t \hat{X}\|_1 \geq \sum_{k \in K^t} \|\bar{A}_k^t \bar{X}\|_1 = \sum_{k \in K^t} |C_k| \|A_k^t \bar{X}\|_1,$$

where the first inequality holds since $\bar{X}$ is optimal for (14); the second inequality holds since $\hat{X}$ is optimal for (15); and the equalities hold by the definition of $\bar{A}^t$. This implies that $\hat{X}$ is an optimal solution to (14). $\square$

Note that (15) can be solved by the algorithm in [21] with the weighted aggregated data $\bar{A}^t$. Therefore, AID can be implemented with the algorithm of Markopoulos et al. [21].

4 Computational Experiment

We test the performance of AID by solving three problems from Section 3: subset selection for least absolute deviation regression (7), L_1 regression over a sphere (9), and L_1 PCA maximizing the projected deviation (12). We compare the performance of AID with benchmark algorithms in the literature. For the computational experiment of (7) and (9), a server with two Xeon 2.70 GHz CPUs and 24 GB RAM is used. For the computational experiment of (12), a personal computer with 8 GB RAM and Intel Core i7 (2.40 GHz dual core) is used. For all problems, let E_{bench} and E_{AID} be the objective function values of the benchmark algorithm and AID, respectively. To evaluate the performance of AID and compare against the benchmark, we use the following performance measures.

Time: Execution time of the benchmark algorithm or AID

T : Number of iteration of AID

$r_{\text{agg}} = \frac{|K^T|}{n}$: Aggregation rate at the termination of AID

ρ : Execution time of AID divided by the execution time of the benchmark

Δ : Relative error of AID compared against the benchmark

Note that the execution times are defined for both algorithms, whereas T and r_{agg} are defined only for AID. Also, ρ and Δ are defined to compare the execution times and relative errors in the objective function. If $\rho < 1$, then AID is faster than the benchmark. For (7), Δ is defined as $\Delta = \frac{|E_{\text{bench}} - E_{\text{AID}}|}{\min\{E_{\text{bench}}, E_{\text{AID}}\}}$ because there are cases such that the benchmark cannot provide optimal solutions within a specified time limit. For (9) and (12), Δ is defined as $\Delta = \frac{|E_{\text{bench}} - E_{\text{AID}}|}{E_{\text{bench}}}$.

4.1 Subset Selection for L1 Regression

We implement the MIP model for (7) and AID for least absolute deviation regression subset selection in C# and CPLEX. Let MIP and AID denote the MIP model for (7) and the AID algorithm. Each algorithm is given a one hour time limit. To set up the M value in (8c), we use the sampling approach of Park and Klabjan [26]. We build 30 regression models by randomly picking p independent variables for each model. Then, the M value is defined by $M = \mu + 2\sigma$, where μ and σ are the average and standard deviation of the coefficients obtained from the 30 regression models. Although there is a small chance the obtained M may not be valid, both MIP models use the same value of M , and we assume this value does not affect the performance comparison. The computation time of M calculation took approximately 100 seconds. For the CPLEX tolerance, we use the default tolerance for (7) and the aggregated problems of AID: relative MIP gap tolerance = 10^{-4} and absolute MIP gap tolerance = 10^{-6} . For the tolerance of AID (tol in Algorithm 1), we use 10^{-4} , which forces AID to terminate only if (5) is smaller than 10^{-4} .

The initial clusters for AID are generated by the following procedure. We first build five regression models with p independent variables, where the variables are selected randomly. Note that we have five residuals for each original entry. With the n by 5 residual matrix, one iteration of the k-means algorithm is used to cluster the original entries into m clusters. The residuals of the regression models are used for the clustering, as we assume that the original entries are similar if the residuals from different models are similar. Since the run time of the k-means algorithm depends on the number of elements of the input matrix and the number of k-means iterations, the proposed procedure is faster than the standard k-means algorithm with the original data.

We test the algorithms with synthetic and real data. First, to systematically check the performance changes across various data sizes, we use randomly generated regression instances for the experiment. To generate random instances, we use the `make_regression` function of the Python package Scikit Learn [29] with noise option equal to 1. The instances are generated from triplet (n, m, p) , where $n \in \{5000, 10000, 20000, 40000\}$ is the number of original entries (data points), $m \in \{20, 30, 40, 50\}$ is the number of independent variables (features), and $p \in \{5, 10, 15\}$ is the number of features in the randomly generated regression model. For each triplet (n, m, p) , 10 instances are generated, which yields a total of 480 instances. Second, a real data set from the database of National Center for Arts Research (NCAR) at Southern Methodist University is used.

The task is to build a regression model to predict the number of attendance of 6,466 art organizations in the U.S. based on 20 independent variables. The independent variables include statistics of the neighborhood of each organization (population, commuting time, income, household size, education level, employment rate, age, art activities, competitions, etc.) and the organization information (revenue, total expense, marketing expense, grants, etc.). The LAD regression is useful for this data set because the response variable (number of attendance) contains outliers.

Both algorithms terminate if optimality is achieved or one hour is elapsed. Since any of the algorithms can terminate without an optimal solution within the one-hour time limit, we check additional performance measures in the following.

Gap: Optimality gap at the termination.

Opt: Percentage such that optimality is guaranteed (Gap =0% or smaller than the tolerance)

We obtain *Gap* from the relative MIP gap of CPLEX for (7) and δ_{AID}^T for AID.

We first present the results for the synthetic data sets. In Table 3, the aggregated result is presented where each row is the average across the 10 random instances for the corresponding triplet (n, m, p) . The first three columns are for the instance parameters, where p is also used for the input parameter for the cardinality constraint.

Parameters			MIP			AID					Comparison	
n	m	p	Gap	Time	Opt	Gap	Time	T	r_{agg}	Opt	ρ	Δ
5,000	20	5	0.00%	15	1	0.00%	11	8.9	0.11	1	0.78	0%
5,000	20	10	0.00%	53	1	0.00%	29	9.9	0.24	1	0.63	0%
5,000	20	15	0.00%	64	1	0.00%	48	10	0.31	1	0.80	0%
5,000	30	5	0.00%	25	1	0.00%	15	8.1	0.13	1	0.70	0%
5,000	30	10	0.00%	71	1	0.00%	37	9.1	0.25	1	0.56	0%
5,000	30	15	0.00%	125	1	0.00%	68	9.4	0.29	1	0.56	0%
5,000	40	5	0.00%	29	1	0.00%	19	7.1	0.12	1	0.67	0%
5,000	40	10	0.00%	65	1	0.00%	48	9	0.25	1	0.81	0%
5,000	40	15	0.00%	167	1	0.00%	93	9.2	0.29	1	0.82	0%
5,000	50	5	0.00%	42	1	0.00%	27	7.1	0.14	1	0.65	0%
5,000	50	10	0.00%	90	1	0.00%	70	8.3	0.29	1	0.89	0%
5,000	50	15	0.00%	187	1	0.00%	135	8.9	0.30	1	0.89	0%
10,000	20	5	0.00%	31	1	0.00%	17	9	0.07	1	0.56	0%
10,000	20	10	0.00%	151	1	0.00%	50	10.2	0.20	1	0.38	0%
10,000	20	15	0.00%	167	1	0.00%	84	10.5	0.25	1	0.54	0%
10,000	30	5	0.00%	45	1	0.00%	29	8.7	0.10	1	0.64	0%
10,000	30	10	0.00%	155	1	0.00%	64	9.8	0.19	1	0.60	0%
10,000	30	15	0.00%	350	1	0.00%	133	10	0.24	1	0.43	0%
10,000	40	5	0.00%	65	1	0.00%	28	7.4	0.06	1	0.43	0%
10,000	40	10	0.00%	213	1	0.01%	96	9.1	0.22	1	0.52	0%
10,000	40	15	0.00%	524	1	0.00%	184	10	0.25	1	0.39	0%
10,000	50	5	0.00%	104	1	0.00%	44	7.6	0.09	1	0.43	0%
10,000	50	10	0.00%	312	1	0.00%	148	9	0.23	1	0.55	0%
10,000	50	15	0.00%	724	1	0.00%	244	9.1	0.25	1	0.35	0%
20,000	20	5	0.00%	72	1	0.01%	30	9.3	0.05	1	0.42	0%
20,000	20	10	0.00%	502	1	0.00%	104	11	0.17	1	0.22	0%
20,000	20	15	0.00%	738	1	0.00%	167	11.1	0.22	1	0.28	0%
20,000	30	5	0.00%	148	1	0.00%	51	9.3	0.08	1	0.36	0%
20,000	30	10	0.00%	734	1	0.00%	138	10.5	0.18	1	0.26	0%
20,000	30	15	0.00%	1,358	1	0.00%	347	11	0.22	1	0.27	0%
20,000	40	5	0.00%	216	1	0.00%	60	8.4	0.06	1	0.31	0%
20,000	40	10	0.00%	840	1	0.00%	205	10	0.19	1	0.36	0%
20,000	40	15	0.01%	1,902	0.9	0.00%	490	10.4	0.23	1	0.30	0%
20,000	50	5	0.00%	266	1	0.00%	69	8	0.06	1	0.27	0%
20,000	50	10	0.00%	882	1	0.00%	336	10	0.21	1	0.41	0%
20,000	50	15	33.66%	2,529	0.6	0.00%	547	10	0.23	1	0.33	> 100%
40,000	20	5	0.00%	447	1	0.00%	61	10	0.03	1	0.19	0%
40,000	20	10	7.08%	2,441	0.9	0.00%	229	11.9	0.13	1	0.11	24%
40,000	20	15	55.68%	3,215	0.4	0.00%	443	12	0.18	1	0.14	> 100%
40,000	30	5	0.00%	386	1	0.00%	87	9.2	0.04	1	0.23	0%
40,000	30	10	49.62%	3,043	0.4	0.00%	305	11	0.14	1	0.13	> 100%
40,000	30	15	89.63%	3,550	0.1	0.00%	835	11.3	0.18	1	0.24	> 100%
40,000	40	5	0.00%	932	1	0.00%	115	8.9	0.05	1	0.18	0%
40,000	40	10	40.73%	2,636	0.5	0.00%	467	11	0.15	1	0.21	> 100%
40,000	40	15	97.24%	3,602	0	0.00%	1,026	11	0.17	1	0.28	> 100%
40,000	50	5	0.00%	964	1	0.00%	133	7.9	0.04	1	0.17	0%
40,000	50	10	17.54%	2,666	0.6	0.00%	742	10.7	0.17	1	0.33	> 100%
40,000	50	15	93.67%	3,602	0	0.00%	1,457	11	0.20	1	0.40	> 100%

Table 3: Results for LAD regression subset selection aggregated by n, m , and p

The Gap of MIP is zero percent when the data size is small ($n \leq 10000$), but it increases as n and m increase; the average gap is 37.6% for the instances with $n = 40,000$. In contrast, The Gap of AID is zero percent across all instances. Similarly, AID solves all instances optimally ($\text{Opt} = 1$), whereas MIP does not solve larger instances optimally ($\text{Opt} < 1$ for most of the instances with $n = 40000$ and $p \geq 10$). As p increases (with fixed $n = 40,000$), the Opt values of MIP rapidly decrease. This implies that MIP is not able to guarantee optimality in one hour for these instances. Further, the relative gap of AID from the optimal solution (Δ) is very large, which implies that MIP cannot provide a good solution within an hour. The execution times of both algorithms are similar when $n = 5000$. However, as n increases, the ρ values decrease, which indicates that AID performs great when the number of entries (n) is very large. For those rows with Opt of MIP less than 1, we used 3,600 seconds, which is a lower bound for the actual execution times of MIP with proved optimality. Hence, the actual ρ values for these rows should be lower than the presented values. The number of AID iterations increases as n and p increase. As n increases, the chance is higher that at least one original entry violates the optimality condition. As p increases, the variety of the regression coefficients increases, as there exists $\binom{m}{p}$ subset choices, and the regression hyperplane can be changed drastically from one iteration to another iteration. These explain the increasing T values in n and p .

We also visually compare the performances of the algorithms by aggregating the results in Table 3 further. In Figure 5, the aggregated result is presented in the bar plot matrix. The rows of the plot matrix give performance measures, and the columns of the plot matrix indicate aggregation parameters. For example, the plot in the “Time” row and “Aggregated by n ” column of the plot matrix shows the execution times of the algorithms aggregated by n . Hence, the horizontal axis is for n , and the vertical axis is for the execution time in seconds. Depending on the performance measure, either one or two series are plotted, where the white and gray bars are for AID and MIP, respectively, and the black bars are for the comparison.

In the first row of the plot matrix, we observe that the execution times of both algorithms increase in n , m , and p . However, the execution time of MIP increases faster than that of AID, and this gives decreasing ρ values with increasing n . This follows the intuition, because a larger number of original entries gives a larger number of original entries per cluster, which helps AID. For increasing m and p , the ρ values stay the same or increase slightly. This is because, with larger m and p , it is more difficult for AID to cluster the original entries and satisfy the optimality condition. As presented in the last row of the plot matrix, the aggregation rate decreases in n , but increases in m and p .

In Table 4, the results for the real data set from NCAR is presented. Trivial cases such as $p = 1$ or 2 are excluded, and we test both algorithms with various p values. As both algorithms terminate with an optimal solution, Gap and Opt are not presented. Observe that we obtain similar results with Table 3. The execution times of both algorithms are similar to the results for instances with $n = 5,000$ and $m = 20$ in Table 3. AID outperforms the benchmark, and the ρ values increase with increasing p . The aggregation rates indicate that, at the termination of AID, approximately 640 aggregated entries are in the aggregated data, and the r_{agg} values tend to increase with increasing p . Most of the selected subsets include commuting time in the area, competition in the area, marketing expense of the organization, and the number of grants received by the organization. This implies that the total number of ticket sales depends on (i) how conveniently the customer can visit the art organization, (ii) the number of art organizations providing similar service in the neighborhood, (iii) the amount of money the organization spends on marketing, and (iv) the number of grants the organization received.

Parameters			MIP	AID			Comparison	
n	m	p	Time	Time	T	r_{agg}	Δ	ρ
6466	20	3	25.8	1.8	10	10%	0.00%	0.07
		4	22.8	1.9	9	8%	0.00%	0.08
		5	34.3	2.9	11	10%	0.00%	0.09
		6	27.9	6.1	10	11%	0.00%	0.22
		7	35.0	5.7	9	12%	0.00%	0.16
		8	40.0	5.6	9	11%	0.00%	0.14
		9	44.7	4.8	11	13%	0.00%	0.11
		10	37.9	12.1	10	13%	0.00%	0.32

Table 4: Results for LAD regression subset selection for NCAR data

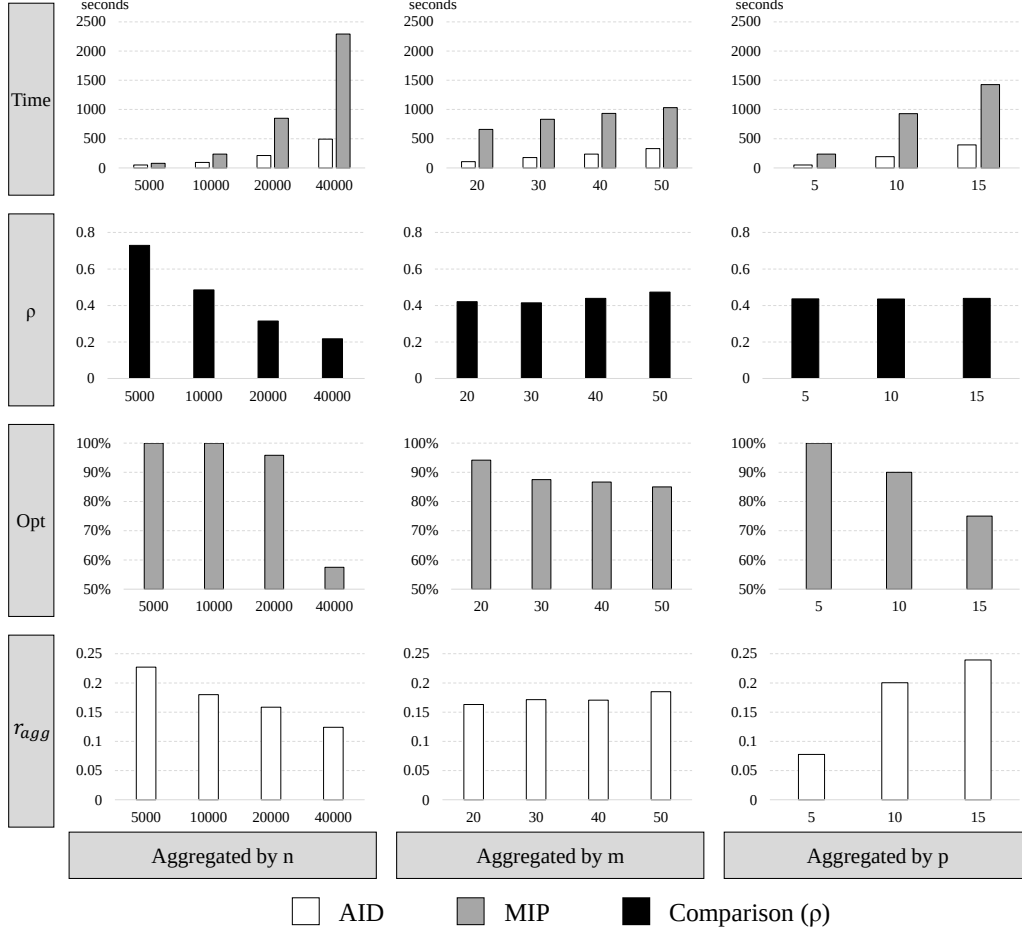


Figure 5: Result for LAD regression subset selection aggregated by one of n, m , and p

4.2 L1 Regression over a Sphere

We implement the QCLP model for (9) and AID for least absolute deviation regression on a sphere in C# and CPLEX. Let QCLP and AID denote the QCLP model for (7) and the AID algorithm. For the CPLEX tolerance, we use the default for (7) and the aggregated problems of AID: tolerance on complementarity for convergence = 10^{-7} . For the tolerance of AID (tol in Algorithm 1), we use 10^{-7} , which causes AID to terminate only if (5) is smaller than 10^{-7} . The initial clusters for AID are generated using the same procedure as in Section 4.1. However, instead of five regression models, we use $(0.1)m$ regression models.

We employ randomly generated regression instances for the experiment. To generate random instances, we use `make_regression` function of Python package Scikit Learn [29] with noise option equal to 1. The instances are generated from pair (n, m) , where $n \in \{25, 50, 100, 200\} \times 1000$ is the number of original entries (data points), and $m \in \{20, 40, 60, 80\}$ is the number of independent variables (features). For each pair (n, m) , 10 instances are generated, which yields a total of 160 instances. The true regression coefficients generated by the default setting of `make_regression` are between 0 and 100. Hence, for each of these instances, we test $R \in \{20, 40, 60, 80\} \times 1000$, where $R = 20$ is the most restrictive parameter, and $R = 80$ is the least restrictive parameter.

In Table 5, the aggregated result is presented. Each row of the table is the average across the 10 outcomes for the corresponding triplet (n, m, R) . For QCLP, the execution times are presented. For AID, the execution time, number of iterations, and aggregation rates are presented. Because r_{agg} values are very small in many cases, we present r_{agg} values in percentage. Finally, to compare the performance, ρ and Δ values are given. In the column for ρ , values greater than 1 are in boldface.

The execution times of QCLP increase with increasing n and m . The execution times of AID increase with increasing n and decreasing R . The ρ values show that AID is much faster than QCLP except for a few cases. Particularly, AID is slower when n is smaller (25,000 and 50,000), but R is large ($R = 80$). We think that the quadratic constraint of (10) with $R = 80$ is not restricting the regression coefficients significantly, and the benefit of using AID diminishes with the non-restrictive constraint. The number of AID iterations increases with increasing n and decreasing R . As n increases, the chance is higher that at least one original entry will violate the optimality condition. As R increases, the quadratic constraint becomes less restrictive, and the regression coefficients do not change drastically from one AID iteration to another. These explain why T is increasing with increasing n and decreasing R .

Parameters			QCLP	AID			Comparison	
n	m	R	Time	Time	T	r_{agg}	ρ	Δ
25,000	20	20,000	17	2	11.2	0.34%	0.10	0.00%
25,000	20	40,000	16	4	11.8	3.18%	0.30	0.00%
25,000	20	60,000	16	15	13.0	9.64%	0.90	0.00%
25,000	20	80,000	15	21	13.5	18.73%	1.49	0.00%
25,000	40	20,000	38	3	9.6	0.45%	0.09	0.00%
25,000	40	40,000	48	4	10.3	0.65%	0.08	0.00%
25,000	40	60,000	40	4	10.5	0.91%	0.10	0.00%
25,000	40	80,000	39	5	11.0	1.27%	0.13	0.00%
25,000	60	20,000	70	5	8.8	0.55%	0.08	0.00%
25,000	60	40,000	94	6	9.8	0.74%	0.06	0.00%
25,000	60	60,000	92	6	10.0	0.96%	0.07	0.00%
25,000	60	80,000	91	7	10.1	1.23%	0.08	0.00%
25,000	80	20,000	117	8	8.5	0.63%	0.07	0.00%
25,000	80	40,000	143	8	9.3	0.82%	0.06	0.00%
25,000	80	60,000	150	9	9.7	1.02%	0.06	0.00%
25,000	80	80,000	158	10	9.8	1.21%	0.07	0.00%
50,000	20	20,000	30	3	10.9	0.17%	0.09	0.00%
50,000	20	40,000	33	5	12.5	0.67%	0.15	0.00%
50,000	20	60,000	32	31	14.0	13.93%	0.97	0.00%
50,000	20	80,000	27	37	14.2	18.51%	1.38	0.00%
50,000	40	20,000	84	6	10.4	0.22%	0.08	0.00%
50,000	40	40,000	93	7	11.0	0.32%	0.07	0.00%
50,000	40	60,000	77	7	10.7	0.44%	0.09	0.00%
50,000	40	80,000	82	8	11.7	0.65%	0.10	0.00%
50,000	60	20,000	156	11	9.8	0.28%	0.07	0.00%
50,000	60	40,000	155	12	9.7	0.39%	0.08	0.00%
50,000	60	60,000	175	12	10.3	0.51%	0.07	0.00%
50,000	60	80,000	150	13	11.3	0.64%	0.09	0.00%
50,000	80	20,000	303	17	9.1	0.34%	0.06	0.00%
50,000	80	40,000	280	18	9.9	0.43%	0.07	0.00%
50,000	80	60,000	294	19	10.2	0.53%	0.07	0.01%
50,000	80	80,000	312	19	10.1	0.64%	0.06	0.00%
100,000	20	20,000	68	6	11.7	0.08%	0.09	0.00%
100,000	20	40,000	65	7	13.3	0.24%	0.11	0.00%
100,000	20	60,000	59	36	14.6	8.25%	0.65	0.00%
100,000	20	80,000	60	49	14.6	10.55%	0.87	0.00%
100,000	40	20,000	193	16	11.3	0.11%	0.08	0.00%
100,000	40	40,000	162	14	10.7	0.17%	0.09	0.00%
100,000	40	60,000	171	14	11.6	0.26%	0.08	0.00%
100,000	40	80,000	160	16	12.7	0.37%	0.10	0.00%
100,000	60	20,000	356	23	10.7	0.14%	0.06	0.00%
100,000	60	40,000	319	24	11.0	0.18%	0.08	0.00%
100,000	60	60,000	294	28	11.7	0.25%	0.10	0.00%
100,000	60	80,000	302	27	11.7	0.34%	0.09	0.00%
100,000	80	20,000	535	36	9.9	0.17%	0.07	0.00%
100,000	80	40,000	562	40	10.3	0.22%	0.07	0.00%
100,000	80	60,000	544	41	11.2	0.28%	0.08	0.00%
100,000	80	80,000	507	42	10.9	0.33%	0.08	0.00%
200,000	20	20,000	145	16	11.8	0.04%	0.11	0.00%
200,000	20	40,000	135	15	13.6	0.11%	0.11	0.00%
200,000	20	60,000	166	67	15.1	4.95%	0.38	0.00%
200,000	20	80,000	132	122	16.3	11.88%	0.99	0.00%
200,000	40	20,000	403	40	12.6	0.06%	0.10	0.00%
200,000	40	40,000	342	42	12.4	0.09%	0.12	0.00%
200,000	40	60,000	345	42	12.8	0.14%	0.12	0.00%
200,000	40	80,000	333	40	13.5	0.22%	0.12	0.00%
200,000	60	20,000	825	69	10.4	0.07%	0.08	0.00%
200,000	60	40,000	754	77	11.6	0.10%	0.10	0.00%
200,000	60	60,000	630	78	11.4	0.13%	0.13	0.00%
200,000	60	80,000	644	78	12.8	0.18%	0.12	0.00%
200,000	80	20,000	1,348	127	11.5	0.08%	0.10	0.00%
200,000	80	40,000	1,445	125	10.9	0.10%	0.09	0.02%
200,000	80	60,000	1,162	114	11.5	0.13%	0.10	0.00%
200,000	80	80,000	1,079	110	11.6	0.16%	0.10	0.00%

Table 5: Results for LAD regression over a sphere aggregated by n, m , and R

We also visually compare the performances of the algorithms by aggregating the results from Table 5 further. In Figure 6, the aggregated result is presented in the bar plot matrix. The rows of the plot matrix

give performance measures, and the columns of the plot matrix show how the results are aggregated.

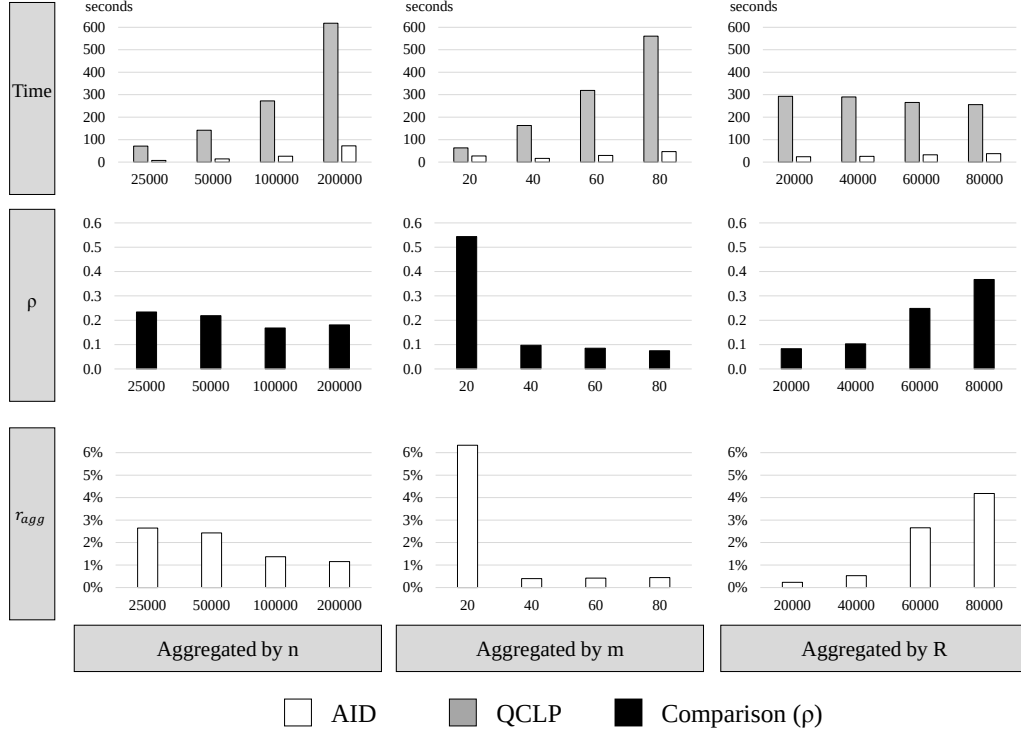


Figure 6: Results for L_1 regression over a sphere aggregated by one of n , m , and R

Similar to the results in Section 4.1, the ρ values decrease with increasing n , as AID obtains a larger benefit when more original entries can be clustered into a cluster. However, the ρ values change differently for this problem. As m decreases, the problem becomes more difficult because we have more regression coefficients (with larger m) with a fixed R . Similarly, the problem becomes more difficult when R decreases because the constraint is more restrictive with a fixed m . When the problem is difficult, the ρ values are smaller.

4.3 L1 Principal Component Analysis

The MATLAB code from Markopoulos et al. [21] is used to solve (12) and the aggregated problem, where the aggregated problem must use adjusted data as described in Section 3. Let MKP and AID denote the algorithm in [21] and the AID algorithm. For the tolerance of AID, we use 0. This implies that the algorithm terminates only if the optimality condition is satisfied. Unlike the other problems, the instance we consider for (12) is small, while the aggregated problem is very sensitive to changes in the data matrix. Hence, the tolerance of AID (tol in Algorithm 1) is set to zero.

The initial clusters are generated by the projected data $A\bar{X}$, where $\bar{X}$ is the m by p principal component matrix obtained by the standard L_2 PCA. The procedure is motivated by the assumption that L_2 PCA gives a good initial solution to the L_1 PCA problem. Also, the computational cost is relatively inexpensive.

We test the algorithms with sampled sub-matrices of the data sets from the UCL Machine Learning Repository [19]. We use four original UCI instances (Cardiotocography, Ionosphere, Indian Liver Patient Dataset, Connectionist Bench (Sonar)) and sample n original entries and m features, where $n \in \{10, 15, 20, 25\}$ and $m \in \{3, 4, 5\}$. For each (n, m) pair of the UCI data, we sample 10 instances.

In Table 6, the result aggregated by n , m , and p is presented. Although we considered sampled instances from four different data sets, we were unable to find performance differences between them. Hence, the result is aggregated by n , m , and p , and each row in Table 6 is the average of 40 outcomes (10 instances for n and m pair and 4 data sets). The last column $Speedup = 1/\rho$ is added because the ρ values are too

small to check the effect of AID in detail. When $p = 1$, the execution times of both algorithms are within one second (except for one case). However, the ρ values indicate that AID is faster than MKP, and the ρ values decrease in n . When $p = 2$, the improvement by AID is even more significant. The ρ values decrease as n and m increase, and AID is 9288 times faster than MKP in the best case. The Δ values are not zero because the aggregated problem solver uses SVD and is sensitive to small changes in the matrix. However, the Δ values are less than 1% for all cases.

Parameters			MKP [21]	AID			Comparison		
n	m	p	Time	T	r_{agg}	Time	Δ	ρ	Speedup
10	3	1	<0.01	1.4	0.44	<0.01	0.76%	0.2806	3.7
10	4	1	0.01	1.2	0.52	<0.01	0.17%	0.1989	7.5
10	5	1	0.03	1.2	0.62	<0.01	0.19%	0.1362	8.3
15	3	1	<0.01	1.5	0.30	<0.01	0.57%	0.1374	8.4
15	4	1	0.04	1.5	0.37	<0.01	0.08%	0.0431	25.9
15	5	1	0.16	1.4	0.42	<0.01	0.20%	0.0235	49.5
20	3	1	<0.01	1.7	0.24	<0.01	0.25%	0.0770	13.8
20	4	1	0.09	1.5	0.28	<0.01	0.34%	0.0182	60.4
20	5	1	0.55	1.4	0.32	<0.01	0.14%	0.0080	151.1
25	3	1	0.01	1.7	0.19	<0.01	0.60%	0.0517	19.9
25	4	1	0.17	1.7	0.23	<0.01	0.87%	0.0097	111.5
25	5	1	1.42	1.6	0.26	<0.01	0.18%	0.0030	371.9
10	3	2	0.01	2.0	0.52	<0.01	0.40%	0.1623	7.8
10	4	2	0.06	1.7	0.58	<0.01	0.25%	0.0711	18.3
10	5	2	0.17	1.3	0.63	<0.01	0.41%	0.0467	26.7
15	3	2	0.03	2.2	0.37	<0.01	0.32%	0.0481	28.0
15	4	2	0.54	2.0	0.43	<0.01	0.43%	0.0135	140.0
15	5	2	4.81	2.1	0.48	0.03	0.30%	0.0058	464.8
20	3	2	0.10	2.6	0.30	<0.01	0.39%	0.0188	67.6
20	4	2	3.07	2.3	0.34	0.01	0.61%	0.0032	629.5
20	5	2	55.46	2.6	0.41	0.09	0.34%	0.0016	2835.5
25	3	2	0.22	3.1	0.28	<0.01	0.29%	0.0128	115.1
25	4	2	11.95	2.9	0.30	0.02	0.28%	0.0015	2030.6
25	5	2	360.78	2.9	0.35	0.18	0.58%	0.0005	9288.6

Table 6: Results for L_1 PCA aggregated by n, m , and p

Because the benchmark algorithm has scalability issues, we tested very small instances in Table 6. However, AID solves most of the instances in Table 6 within 0.1 second. Hence, we also examine the performance of AID for larger instances. Using the same UCI data and sampling procedure, we create instances with $n \in \{60, 80, 100\}$ and $m \in \{3, 4, 5\}$. However, due to the high time complexity of the aggregated problem solver, we were not able to consider larger m and p . In Table 7, the execution times of AID are reported for larger instances. When $p = 1$, AID spends less than 0.01 second. However, when $p = 2$, the execution times of AID also increase as n and m increase. This has two possible reasons. First, for most cases with $p = 2$, AID still terminates within a second. However, for a few cases, AID spends more than 100 seconds because AID reaches the point at which the aggregated problem cannot be solved quickly by the aggregated problem solver. Recall that the complexity of the aggregated problem solver is $O(n^{mp-p+1})$. For example, if the aggregated data has 20 aggregated entries with $m = 5$ and $p = 2$, AID spends approximately 55.46 seconds to solve the aggregated problem, where the time is estimated from Table 6.

To further investigate the impact of AID, in Figure 7, we present a scatter plot using the values in Table 6. The horizontal and vertical axes are the values of $\ln(n^{mp-p+1})$ and $\ln(1/\rho)$, respectively. The values of $\ln(n^{mp-p+1})$ represent the worst case time complexity $O(n^{mp-p+1})$ of the benchmark algorithm with respect to the problem size. The values of $\ln(1/\rho)$ represent the speed-up by AID. Observe that a straightforward relationship exists. As n, m , and p increase, n^{mp-p+1} increases and the speed-up by AID increases. Therefore, we expect that the ρ values would be much smaller for larger data sets, although we cannot show this due to the scalability issues.

5 Discussion

In this section, we discuss a few characteristics and implementation issues of AID. The discussion here could be useful when AID is implemented for a new problem. First, we discuss the type of problems AID can most benefit. Next, we check how inputting different data sets to the initial clustering algorithm can change the performance of AID. Finally, we discuss how to increase the speed of AID.

Parameters			AID		
n	m	p	T	r_{agg}	Time
60	3	1	2.3	0.09	<0.01
60	4	1	2.4	0.11	<0.01
60	5	1	2.2	0.12	<0.01
80	3	1	2.2	0.07	<0.01
80	4	1	2.4	0.08	<0.01
80	5	1	2.3	0.09	<0.01
100	3	1	2.3	0.05	<0.01
100	4	1	2.7	0.07	<0.01
100	5	1	2.6	0.08	0.01
60	3	2	3.8	0.15	<0.01
60	4	2	3.9	0.18	0.22
60	5	2	3.6	0.19	5.16
80	3	2	4.4	0.13	0.01
80	4	2	3.8	0.14	0.27
80	5	2	4.3	0.16	27.71
100	3	2	4.7	0.12	0.03
100	4	2	4.4	0.12	2.07
100	5	2	4.5	0.13	12.88

Table 7: Performance of AID for L_1 PCA

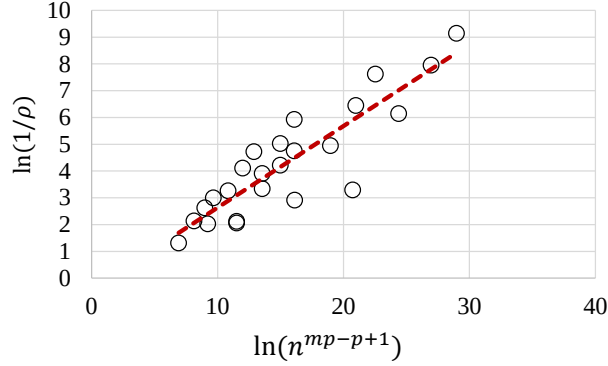


Figure 7: Relationship between benchmark algorithm complexity and speed-up

5.1 Performance of AID for Different Problems

In this section, we evaluate the differing performance of AID for the problems considered in Section 4. In Figure 8, we plot the combined results presented in Tables 3, 5, and 6. The horizontal and vertical axes are for $n \cdot m$ and ρ , where $n \cdot m$ is the size of the data matrix (number of rows $\times$ number of columns) and ρ is the execution time ratio between AID and the benchmark. Although there exist additional parameters other than n and m (such as p and R), we do not distinguish them here. The squares are for the regression subset selection (denoted by MIP in the figure) result from Table 3, the rhombuses are for the regression over a sphere (denoted by QCLP in the figure) result from Table 5, and the circles are for the L_1 PCA (denoted by PCA in the figure) result from Table 6.

Observe that all the ρ values of L_1 PCA are smaller than 0.4, while the matrix sizes are smaller than for the other two problems. The data matrices are approximately 10^4 times smaller for L_1 PCA, but the improvement by AID is the largest. This is because the time complexity of the algorithm for the original problem is high. Between (7) and (9), the ρ values of the regression subset selection problem tend to be smaller than the ρ values of the other. This is expected because an MIP generally is more difficult to solve than a QCLP. To have ρ values smaller than 1, the data matrix for QCLP should be large enough (here, $n \times m > 10^6$). Therefore, we conclude that AID is recommended and has the largest potential benefit when the algorithm for the original problem has a high time complexity. In other words, if the original problem is easy to solve, AID can be slower than the original algorithm.

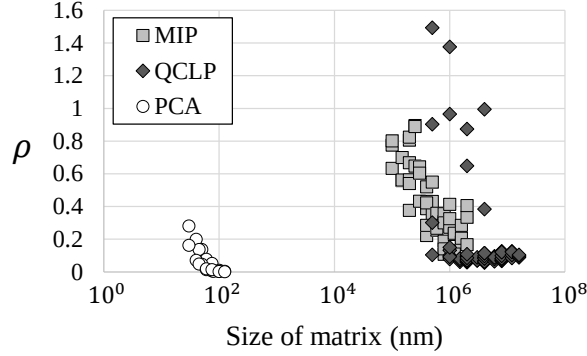


Figure 8: Comparison of performance of AID for different problems

5.2 Performance of AID with Different Initial Cluster Data

In this section, we test the effect of using different initial clusters for AID for (9) with fixed $n = 100,000$ and $R = 20,000$. In detail, we compare two different inputs to the k-means algorithm. The first approach employs the residuals of m regression models, and the second approach uses the original data set. In Table 8, each row is the average of 10 instances.

m	AID with clusters by residuals			AID with clusters by original data		
	Time	T	r_{agg}	Time	T	r_{agg}
20	5.4	11.7	0.08%	7.5	11.4	0.07%
40	13.4	11.3	0.11%	22.4	11.6	0.09%
60	21.6	10.7	0.14%	46.1	11.6	0.11%
80	33.6	9.9	0.17%	83.2	11.3	0.13%

Table 8: Effect of Initial Clustering Data

Both approaches have similar aggregation rates, while the second approach has slightly smaller values. On the other hand, the first approach has a faster execution time, and the difference becomes significant as m increases. First, the number of iterations is smaller for the first approach, which reduces the execution time. Second, even with the one iteration of the k-means algorithm, clustering small dimensional data (first approach) is much faster. Depending on the problem considered, it might be helpful to use the original data set for initial clustering. However, when the number of features (m) is large, obtaining rough initial clusters in a short time can improve the overall execution time.

5.3 Increasing Speed of AID

When AID still cannot solve the problem in a reasonable amount of time, we can try to accelerate AID by sacrificing solution accuracy. In this section, we discuss how to balance between the speed and accuracy of AID. The speed of AID can be controlled in several ways. However, increasing the speed decreases the solution accuracy. Also, depending on the problem, some of the proposed approaches here may not be available or working properly.

The first approach is to decrease the accuracy of the aggregated problem solver. In each iteration of AID, the aggregated problem is solved. If we decrease the accuracy of the algorithm for the aggregated problem, time per iteration can be reduced. In Figure 9, we present the effect of changing the tolerance of the QCLP solver for the aggregated problem for L1 regression over a sphere. For this experiment, we use instances with $n = 100,000$ and $m = 20$ and set $R = 60,000$. The default tolerance for the aggregated problem is 10^{-7} , and we check how AID performs over tolerances from 10^{-8} to 10^{-3} . When the tolerance is less than 10^{-5} , the relative error remains near zero, while the ρ value decreases. Hence, we can speed-up AID without losing accuracy. However, when the tolerance is greater than 10^{-5} , the relative error drastically increases, and the ρ value also increases. Beyond a certain tolerance (in this experiment, 10^{-5}), the execution time of

AID increases with decreasing tolerance because the solutions are not accurate and AID needs to spend an extra number of iterations before termination.

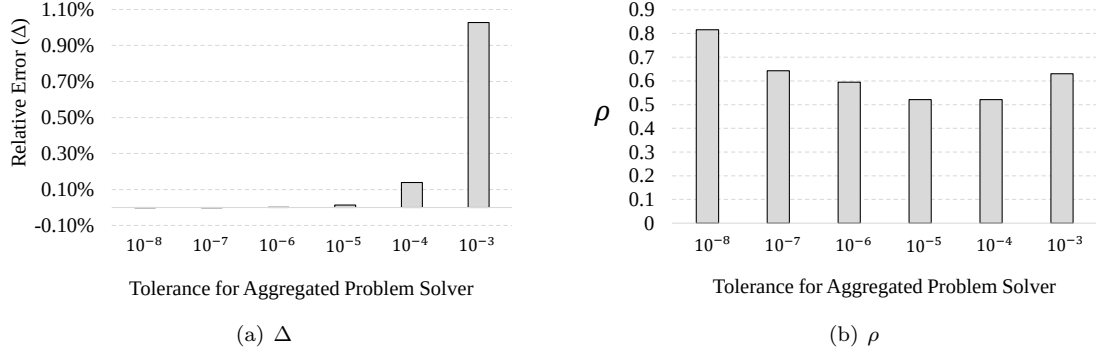


Figure 9: Effect of changing tolerance for aggregated problem solver

The second approach to reducing the execution time of AID is to start with a smaller number of initial clusters ($|K_0|$). In Figure 10, we present the effect of changing the number of initial clusters for L_1 PCA. For this experiment, we use instances with $n = 20$ and $m = 4$ and set $p = 2$. As $|K_0|$ increases, the ρ value increases, which shows that the execution time of AID is increasing. However, when $|K_0|$ increases, the relative error decreases because the initial aggregated data is closer to the original data. Park and Klabjan [27] recommends to start with the smallest $|K_0|$, and this has been effective for most problems. However, when the aggregated problem solver is sensitive, small $|K_0|$ can make the solution less accurate.

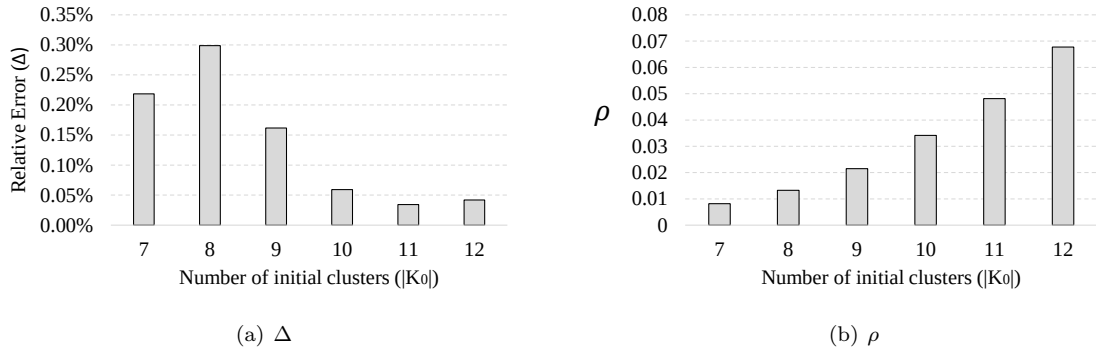


Figure 10: Effect of changing number of initial clusters

The third approach to reducing the execution time of AID is to control the tolerance of the optimality gap of AID (tol in Algorithm 1). For this experiment, we use instances with $n = 100,000$ and $m = 50$ and set $p = 10$. In Figure 11, we present the effect of changing AID tolerance for subset selection for L1 regression. As tol increases, the relative error increases, but the ρ value decreases. This approach is useful when the last two or three iterations of AID are slow when solving the aggregated problem, while the optimality gap of AID is decreasing slowly.

References

- [1] E. Balas. Solution of large-scale transportation problems through aggregation. *Operations Research*, 13(1):82–93, 1965.
- [2] A. Bärmann. *Solving network design problems via decomposition, aggregation and approximation*. Springer Fachmedien Wiesbaden, 2016.

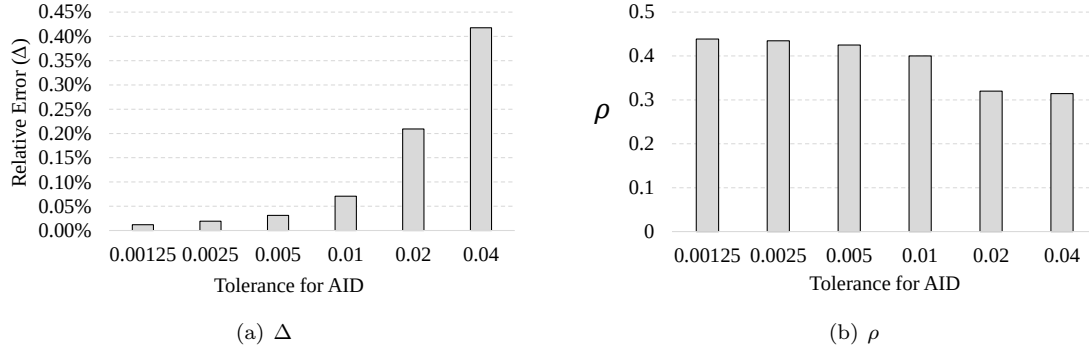


Figure 11: Effect of changing AID tolerance

- [3] Andreas Bärmann, Frauke Liers, Alexander Martin, Maximilian Merkert, Christoph Thurner, and Dieter Weninger. Solving network design problems via iterative aggregation. *Mathematical Programming Computation*, 7(2):189–217, 2015.
- [4] D. Bertsimas and R. Shioda. Algorithm for cardinality-constrained quadratic optimization. *Computational Optimization and Applications*, 43:1 – 22, 2009.
- [5] D. Bertsimas, A. King, and R. Mazumder. Best subset selection via a modern optimization lens. *Annals of Statistics*, 2015.
- [6] J.P. Brooks, J.H. Dulá, and E.L. Boone. A pure l1-norm principal component analysis. *Computational Statistics & Data Analysis*, 61:83 – 98, 2013.
- [7] V. Chvátal and P.L. Hammer. Aggregation of inequalities in integer programming. *Annals of Discrete Mathematics*, 1:145–162, 1977.
- [8] François Clautiaux, Sad Hanafi, Rita Macedo, Marie-Hélène Voge, and Cláudio Alves. Iterative aggregation and disaggregation algorithm for pseudo-polynomial network flow models with side constraints. *European Journal of Operational Research*, 258(2):467 – 477, 2017.
- [9] John R. Current and David A. Schilling. Analysis of errors due to demand data aggregation in the set covering and maximal covering location problems. *Geographical Analysis*, 22(2):116–126, 1990.
- [10] James R. Evans. A network decomposition / aggregation procedure for a class of multicommodity transportation problems. *Networks*, 13(2):197–205, 1983.
- [11] T. Evgeniou and M. Pontil. Support vector machines with clustering for training with very large datasets. In *Methods and Applications of Artificial Intelligence, Volume 2308 of the series Lecture Notes in Computer Sciences*, pages 346–354, 2002.
- [12] Robert Geisberger, Peter Sanders, Dominik Schultes, and Christian Vetter. Exact routing in large road networks using contraction hierarchies. *Transportation Science*, 46(3):388–404, 2012. doi: 10.1287/trsc.1110.0401.
- [13] Gene H Golub and Charles F Van Loan. *Matrix computations*, volume 3. JHU Press, 2012.
- [14] Åsa Hallefjord and Sverre Storøy. Aggregation and disaggregation in integer programming problems. *Operations Research*, 38(4):619–623, 1990.
- [15] Hoon Jang and Taesik Lee. Demand point aggregation method for covering problems with gradual coverage. *Computers & Operations Research*, 60:1 – 13, 2015.

- [16] Qifa Ke and Takeo Kanade. Robust l1-norm factorization in the presence of outliers and missing data by alternative convex programming. In *Proceedings of the 2005 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR'05)*, pages 739–746, Washington, DC, USA, 2005. IEEE Computer Society.
- [17] Hiroshi Konno and Rei Yamamoto. Choosing the best set of variables in regression analysis using integer programming. *Journal of Global Optimization*, 44(2):273–282, 2009. ISSN 1573-2916. doi: 10.1007/s10898-008-9323-9.
- [18] Nojun Kwak. Principal component analysis based on l1-norm maximization. *IEEE transactions on pattern analysis and machine intelligence*, 30(9):1672–1680, 2008.
- [19] M. Lichman. UCI machine learning repository, 2013. URL <http://archive.ics.uci.edu/ml>.
- [20] Igor Litvinchev and Vladimir Tsurkov. *Aggregation in large-scale optimization*, volume 83. Springer, 2003.
- [21] P. P. Markopoulos, G. N. Karystinos, and D. A. Pados. Optimal algorithms for l1-subspace signal processing. *IEEE Transactions on Signal Processing*, 62(19):5046–5058, Oct 2014.
- [22] Roy Mendelssohn. Technical note - improved bounds for aggregated linear programs. *Operations Research*, 28(6):1450–1453, 1980.
- [23] Nathan Srebro Nati and Tommi Jaakkola. Weighted low-rank approximations. In *20th International Conference on Machine Learning*, pages 720–727, 2003.
- [24] Alexandra M. Newman and Mark Kuchta. Using aggregation to optimize long-term production planning at an underground mine. *European Journal of Operational Research*, 176(2):1205 – 1218, 2007. ISSN 0377-2217. doi: <http://dx.doi.org/10.1016/j.ejor.2005.09.008>.
- [25] Feiping Nie, Heng Huang, Chris Ding, Dijun Luo, and Hua Wang. Robust principal component analysis with non-greedy l1-norm maximization. In *Proceedings of the Twenty-Second International Joint Conference on Artificial Intelligence - Volume Volume Two, IJCAI'11*, pages 1433–1438. AAAI Press, 2011. ISBN 978-1-57735-514-4.
- [26] Young Woong Park and Diego Klabjan. Subset selection for multiple linear regression via optimization. *Technical report*, Available from <http://www.klabjan.dynresmanagement.com>, 2013.
- [27] Young Woong Park and Diego Klabjan. An aggregate and iterative disaggregate algorithm with proven optimality in machine learning. *Machine Learning*, 105(2):199–232, 2016.
- [28] Young Woong Park and Diego Klabjan. Iteratively reweighted least squares algorithms for l1-norm principal component analysis. In *2016 IEEE 16th International Conference on Data Mining (ICDM)*, pages 430–438, 2016.
- [29] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12: 2825–2830, 2011.
- [30] David F. Rogers, Robert D. Plante, Richard T. Wong, and James R. Evans. Aggregation and disaggregation techniques and methodology in optimization. *Operations Research*, 39(4):553–582, 1991.
- [31] C.M. Shetty and Richard W. Taylor. Solving large-scale linear programs by aggregation. *Computers & Operations Research*, 14(5):385–393, 1987.
- [32] Nickolay T. Trendafilov. On the 1 procrustes problem. *Future Generation Computer Systems*, 19(7): 1177 – 1186, 2003.

- [33] Nickolay T. Trendafilov and G. A. Watson. The l1 oblique procrustes problem. *Statistics and Computing*, 14(1):39–51, 2004.
- [34] I.Y. Vakhutinsky, L.M. Dudkin, and A.A. Ryvkin. Iterative aggregation-a new approach to the solution of large-scale problems. *Econometrica*, 47(4):821–841, 1979.
- [35] H. Yu, J. Yang, and J. Han. Classifying large data sets using svm with hierarchical clusters. In *Proceedings of the 9th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 306–315, 2003.
- [36] Hwanjo Yu, Jiong Yang, Jiawei Han, and Xiaolei Li. Making SVMs scalable to large data sets using hierarchical cluster indexing. *Data Mining and Knowledge Discovery*, 11(3):295–321, 2005.
- [37] P.H. Zipkin. *Aggregation in linear programming*. PhD thesis, Yale University, 1977.